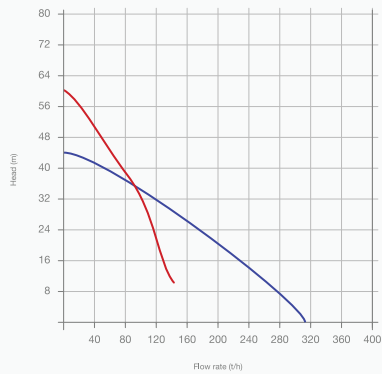
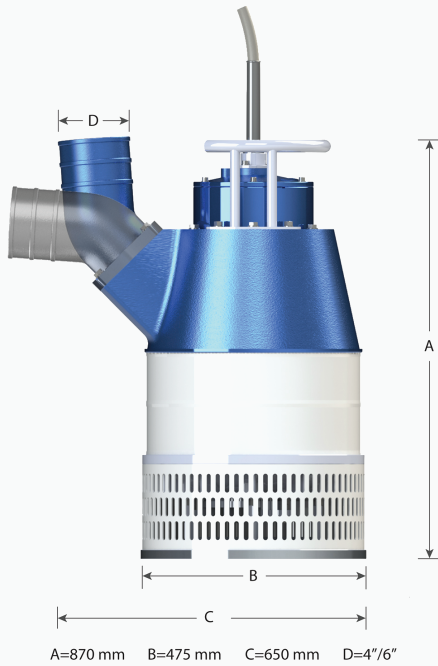


50 Hz	
Specification Headings	4'' / 6''
Power	22 kW
Voltage	380 V
Current	33 A
Weight	185 kg

DP 185

SUBMERSIBLE DRAINAGE PUMP

Pump Type

- YB: High pressure
- DB: Low pressure

Pump Class

Submersible drainage pump

Electric Motor

Stator insulation

Motor Protection

Motor protection relay with thermistor (PTC) and phase sequence monitoring

Standard Cable Cross-Section and Length

380 V:4G4 mm² BLDL-vg, 20 m

Operating Limits

Maximum submergence depth: 20 m
 Maximum liquid temperature: 40 °C
 Permissible pH range: 5–8
 Maximum fluid density: 1100 kg/m³
 Maximum solids passage (diameter): Ø 10 mm

Bearings

Ball bearings with C3 internal clearance

Materials

Cast parts: Aluminum
 Outer casing: Stainless steel
 Motor shaft: Stainless steel
 Impeller: Ductile iron (spheroidal graphite iron)
 Diffuser: Nitrile rubber (NBR)
 Screws and nuts: Stainless steel
 O-rings: Nitrile rubber (NBR)

Accessories

Thermal switch



info@anadolu-elektrik.com
 info@altinerpompa.com

+90 312 354 71 68
 +90 312 354 71 69

DP 185