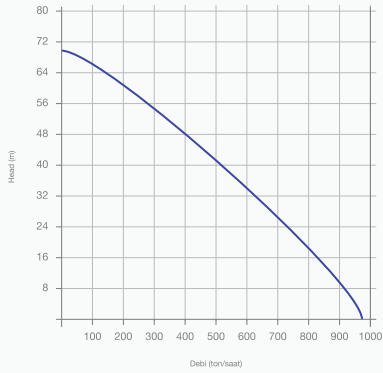
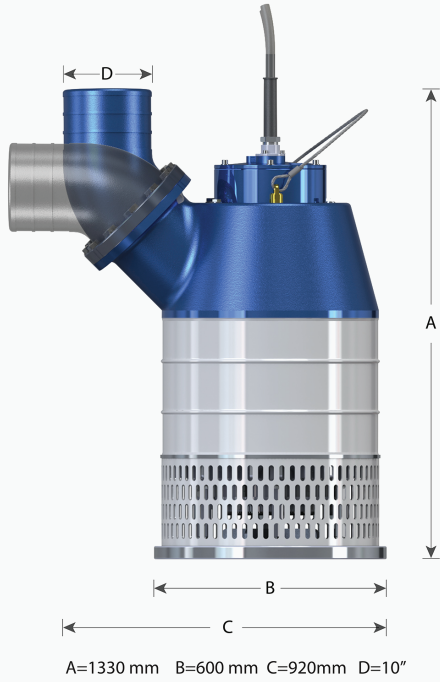


50 Hz	
Specification Headings	10"
Power	55 kW
Voltage	380 V
Current	90 A
Weight	600 kg

DP 550

SUBMERSIBLE DRAINAGE PUMP

Pump Type

N: Normal pressure

Pump Class

Submersible drainage pump

Electric Motor

Stator insulation

Motor Protection

Thermistor-protected

Standard Cable Cross-Section and Length

380 V:4G2,5 mm² BLDL-vg, 20 m

Operating Limits

Maximum submergence depth: 20 m
Maximum liquid temperature: 40 °C
Permissible pH range: 5–8
Maximum fluid density: 1100 kg/m³
Maximum solids passage (diameter): Ø 15 mm

Bearings

Ball bearings with C3 internal clearance

Materials

Cast parts: Aluminum
Outer casing: Stainless steel
Motor shaft: Stainless steel
Impeller: Ductile iron (spheroidal graphite iron)
Diffuser: Nitrile rubber (NBR)
Screws and nuts: Stainless steel
O-rings: Nitrile rubber (NBR)



info@anadolu-elektrik.com
info@altinerpompa.com

+90 312 354 71 68
+90 312 354 71 69