
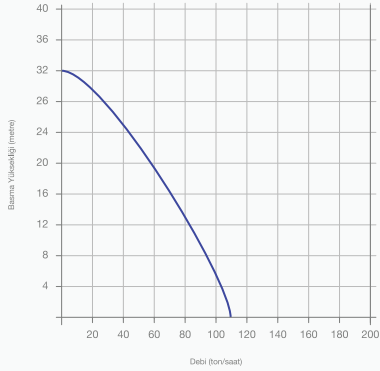


DP 75

SUBMERSIBLE DRAINAGE PUMP

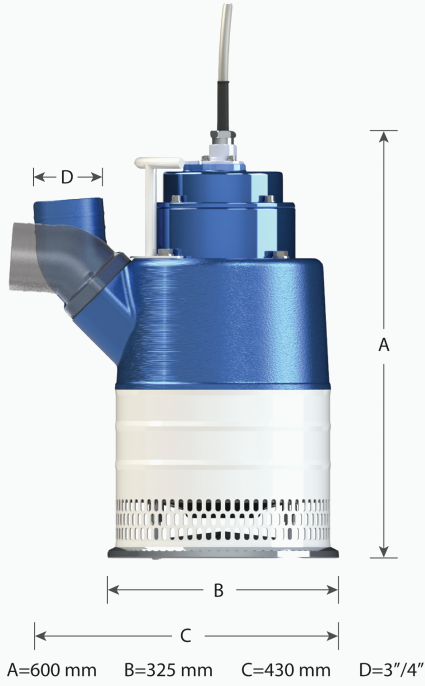

50 Hz	
Çıkış Başlıkları	3" / 4"
Güçü	7.5 kW
Voltaj	380 V
Akım	15 A
Ağırlık	65 kg

Pump Type

N: Normal pressure

Pump Class

Submersible drainage pump

Electric Motor

Stator insulation

Motor Protection

Motor protection relay with thermistor (PTC) and phase sequence monitoring

Standard Cable Cross-Section and Length

380 V:4G2,5 mm² BLDL-vg, 20 m

Operating Limits

Maximum submergence depth: 20 m

Maximum liquid temperature: 40 °C

Permissible pH range: 5–8

Maximum fluid density: 1100 kg/m³

Maximum solids passage (diameter): Ø 7 mm

Bearings

Ball bearings with C3 internal clearance

Materials

Cast parts: Aluminum

Outer casing: Stainless steel

Motor shaft: Stainless steel

Impeller: Ductile iron (spheroidal graphite iron)

Diffuser: Nitrile rubber (NBR)

Screws and nuts: Stainless steel

O-rings: Nitrile rubber (NBR)

Accessories

Thermal switch



info@anadolu-elektrik.com
info@altinerpompa.com

+90 312 354 71 68
+90 312 354 71 69